


">

6N1P, 6N1PVI, 6N1PEV (6H1n, 6H1nBN, 6H1nEB)**General**

Double triodes, used as an low frequency power amplifier.

Envelope: glass miniature.

Mass 15 g.

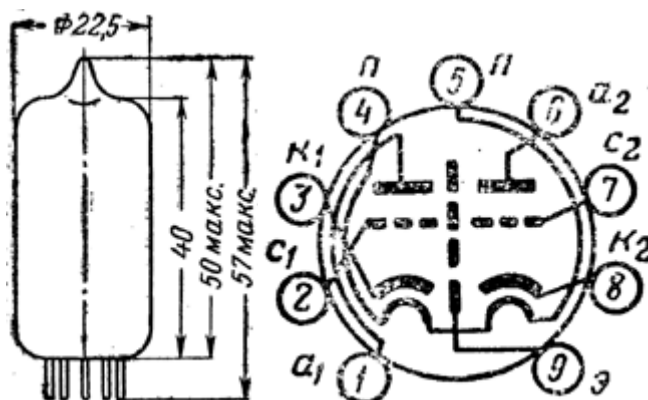Lead diagram**General characteristics**(at $U_H=6.3V$, $U_A=250V$, $R_K=600\ \Omega$):

Type	6N1P	6N1PVI	6N1PEV
Filament (heater) current, mA	600±50	600±50	600±50
Anode current, mA	5,6 - 10,5	7,5±1,5	7,5±1,5
Reverse grid current, mA	£1	£0,5	£0,2
Dissipate cathode-heater current, mA	£15	£15	£12
Mutual conductance, mA/V	4,5±1,0	4,45±0,65	4,5±0,8
Gain coefficient	35±7	35±7	35±7
Input resistance (by $f=60\ \text{MHz}$), Kohm			
Equivalent noise resistance, Kohm			
Vibration noise (by $R_A=2\ \text{K}\Omega$), mV	£100	£80	£50
Inter electrode capacitance, pF: input	3,1±1,1	3,3±0,9	3,05±0,55
output 1 st triode	1.6±0.5	1.75±0.5	1.75±0.5
output 2 nd triode	1.7±0.5	1.95±0.5	1.75±0.5
transfer	1.85±2.2	£2.6	£2.6
Operation period, hrs	³3000	³3000	³5000

Limited operating values

Type	6N1P	6N1PVI	6N1PEV
Filament voltage, V	5,7-7	5,7-7	6-6.6
Anode voltage, V	300	300	250
Grid voltage, V			
Cathode - heater voltage, V	100	120	120
Cathode current, mA	25	25	25
Anode dissipation (each triode), W	2,2	2,2	2,2
Grid dissipation, W			
Resistance in grid circuit, MOhm	1	2	0,5

Operating environmental conditions

Type	6N1P	6N1PVI	6N1PEV
Acceleration of vibration loads, g	2,5	6	6
by frequencies, Hz	--	5-600	5-600
Acceleration of multiple impacts, g	12	150	150
Acceleration of single impact, g	-	500	500
Continuos acceleration, g	-	100	100
Ambient temperature, °C	-60 to +70	-60 to +90	-60 to +90
Relative humidity at up to 40°C, %	98	98	98

Plate-grid and plate curves

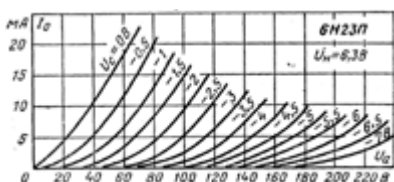
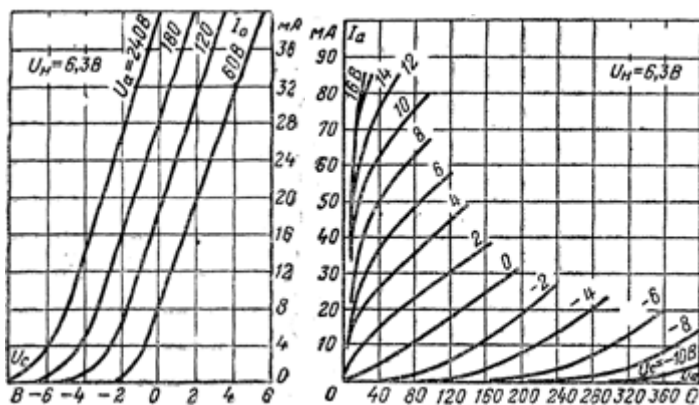


Plate-grid curves Plate curves